

# WE KEEP IT IN HARMONY WITH THE EARTH

Control valve solutions for the mining industry



**RAMÉN**  
Industrial Control Valves and Regulators

## About Ramén valves

**Ramén Ball Sector Valve Type KS**, designed and manufactured in Sweden was introduced in 1967 and since then thousands of valves have been installed in multiple industries such as pulp and paper, mining, chemical, gas, marine and offshore, water and wastewater treatment. The design and construction technique of Ramén KS series are based on long and diversified practice in harsh applications and environments. Ramén KS has proved to be advantageous for tight shut off and for throttling control of gases, liquids and slurries at moderate pressure and temperature conditions.



## Control valves for the mining industry

To stay competitive on the market for raw materials, the equipment needs to be designed for the rough environment. Especially the highly abrasive and erosive slurry puts special demands on the valves to keep maintenance cost down. At Ramén we have decades of experience in working with the mining industry in Sweden, Finland and Norway.

To meet the needs of the industry, Ramén offers Ball Sector Valve KS series as well as KSG model (i.e.a rubber lined version of the model KS). KSG rubber lining makes it able to withstand the wear caused by hard particles in the slurry. Its resilience, excellent regulating characteristics and affordability have made it completely unique on the market. Ramén KS series are self-adjusting meaning in case of wear the valve is able to keep the flow characteristic unaltered by changing operating position.

### Features and benefits

- Robust and compact design, low maintenance and easy operation
- No clogging and increased lifetime
- Self-drained with no hidden cavities leading to no dewatering
- Straight through bore and short body construction resulting in less wear
- Easy automation with small actuators due to low torque operation

## We handle

### Ore Concentrates

Throttling and isolation of abrasive slurries

### Sand Pumping

Granulate flow

### Recycled Water

Water treatment

### Mixing

Density control

### Dosing

Throttling of chemical additives

### Tank Bottom Valve

Outflow from silo and hoppers



## Controlability simpler, wider and less cost

Quarter turn movement gives simpler and less expensive control possibilities. The trunnion design with the significant elliptical to circular opening enables 300:1 rangeability and gives a chance for process designers to avoid higher required quantities of valves, providing an accurate wide range and affordable control.

## Reliability solid design for minimum operating cost

Compact design with protected stem gives an excellent maintenance free choice for users in heavy industries. Rigid designed valve made of high quality materials guarantees a long life time, high performance valve with optimized life cycle cost. The unique Ball Sector design enables a constant seat support and seat protection in open position. With tight shut off and self draining construction it creates a safe operation for all types of isolating and control applications.

## Flexibility simply fit

Ramén Ball Sector valves can easily be fitted with an electrical, pneumatic, hydraulic or hybrid actuator. Valves can be simply ordered in wide range of materials like rubber lined cast iron, stainless steel, Duplex, super Duplex, SMO, Hastelloy and titanium. The Ball Sector Valves can be delivered in wafer and flanged design according to ANSI, DIN/EN, ISO, API, JIS or other standards. Standard connection for Ramén KS 25-250 is wafer type which makes it an easy fit on new and existing plants, saving extra material and cost. The KS 300 comes with flanges.

Ramén Ball Sector valves are made of high quality and certified materials based on the client requirements like EN, ISO material certifications. Ball Sector valves can be fitted with noise reduction trims, to comply with customers' noise limit criteria. Ramén KS valves have been granted Pressure Equipment Directive (PED) category II module D1 certification and can also be certified by different third party/classification societies if required.

## Sustainability intelligent design, environmentally friendly

Ramén KS valves presents a creative design to minimize the required material of construction, reducing the environmental impact. Low maintenance valve with minimum requirement for spare parts leaves an environmentally friendly solution through the plant life cycle. Ball sector valves provide higher  $C_v$  ( $K_{vs}$ ) value and rangeability compared to other valve types which can substantially reduce the size and number of valves, saving cost and material at the same time.



## Construction principle

Ramén Ball Sector Valve is made from a ball sector which via two shafts is journal led in the valve body. One part of the ball sector sphere is used for shut-off. The other part of the sphere has a hole with a diameter, which is about 80% of the nominal valve size.

The ball sector is turned through 90° on operation from open to fully closed. The shape of the valve opening (flow area) is thereby changing from fully circular to elliptical. The circular opening reduces the risk of plugging and is less subject to wear in throttling position than the more slot-like flow in certain other types of control valves.

## Throttling control characteristics

It is important to observe the difference between inherent valve flow characteristic at constant pressure drop and installed valve flow characteristic at varying pressure drop. The left hand diagram below (Fig. 1) presents the inherent flow characteristic of Ramén KS for air and water when pressure drop is constant. It is near to equal percentage. Shown also for comparison is the characteristic of a linear valve.

The right hand diagram (Fig. 2) presents the installed characteristic for the same valves when installed in a control loop where the valve pressure drop increases when the valve is closing. An equal percentage characteristic becomes more like linear. A linear characteristic becomes more like quick opening. The more the pressure drop is changing for a certain change of flow, the more the installed characteristic is altered. The comparison shows that the installed flow characteristic of Ramén KS is very suitable for the majority of all control valve installations with its equal percentage characteristics.



Ramén Ball Sector Valve KSG installed in a mining facility

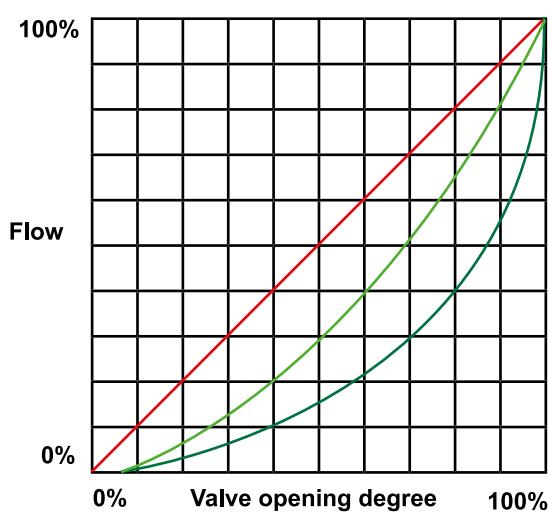
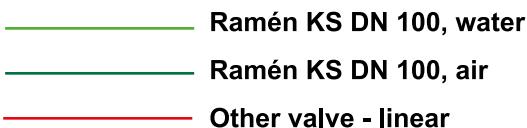


Fig. 1 Inherent flow characteristic at constant pressure drop

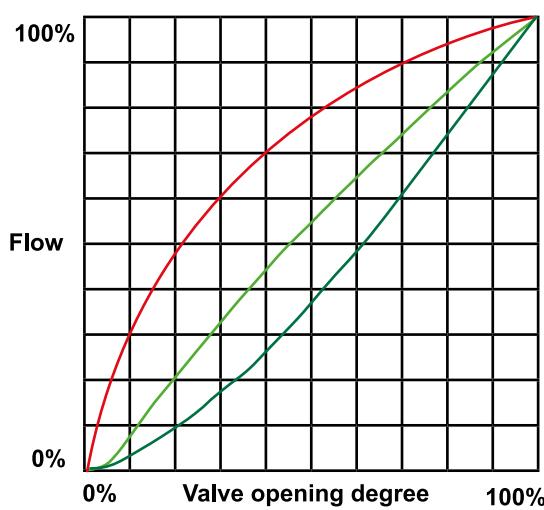


Fig. 2 Example of installed flow characteristic with increasing pressure drop on closing valve


## Valve data

DN	25	40	50	80	100	150	200	250	300
<b>K<sub>vs</sub> [m<sup>3</sup>/h]</b>	0,025-21	34-64	94	255	390	810	1365	2220	3840
<b>C<sub>v</sub> [gpm]</b>	0,03-25	40-75	110	300	460	950	1600	2600	4500
<b>Actuator torque [Nm]</b>	Recommended Max.	20-50 100	30-90 100	30-90 200	80-200 200	80-200 400	160-400 400	250-600 700	700-1200 2000

## Technical specifications

<b>Design</b>	Flangeless, wafertype (size DN 300 flanged)	
<b>Nominal sizes</b>	DN 25 - DN 300	1"-12"
<b>Material</b>	Body Shafts Ball Sector O-rings Bearing	EN 1.4409 EN 1.4460 EN 1.4409+Cr* Viton® Rulon®
<b>Nominal pressure</b>	DN 25 - DN 50 DN 80 - DN 100 DN 150 - DN 250 DN 300	PN 40 (for flange PN 10/40 and ANSI 150/300/600) PN 25 (for flange PN 10/25 and ANSI 150/300) PN 16 (for flange PN 10/16 and ANSI 150) PN 16 (Flanged PN 16 or ANSI 150)
<b>Operating temperature</b>	- 40° C to +250° C	- 40° F to +482° F
<b>Leakage class according to EN60534-4</b>	Soft seat: VI Metal seat: IV	
<b>Characteristic</b>	Equal percentage	
<b>Rangeability</b>	300:1	
<b>Seat</b>	Soft seat: PTFE (Carbon/graphite reinforced) Metal seat: Stellite	
<b>Options</b>	O-rings Alloy steels  Seat	EPDM, Nitril, Kalrez®, Viton GLT, EPDM 90 254 SMO, Hastelloy, Duplex, Super Duplex, Titanium grade 5 White PTFE, PEEK, FDA Approved

\* Hard chromed ball sector

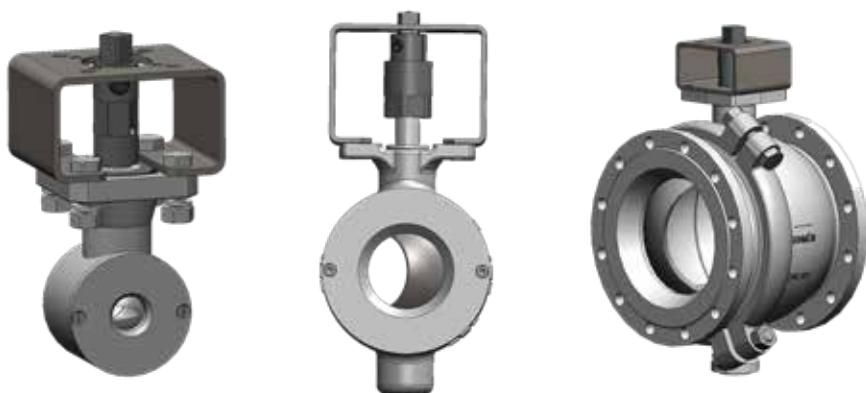

Ramén KS DN 25/80/300, 3D animations

## Ramén KSG rubber lined valve

Ramén Ball Sector Valve model KSG is a rubber lined version of the model KS, developed for the mining industry. KSG's rubber lining makes it resistant to wear and tear in the valve for slurries, gravel, iron ore and other highly abrasive media. All wetted parts like body, ball sector and the outlet protection ring are lined with polyurethane (PUR) and natural rubber making particles bounce off rather than wearing of metal material on the wetted parts.

The Ramén KSG ball sector valve is self-drained, has no hidden cavities. Besides, the circular to elliptical geometry prohibits clogging and dewatering increasing the KSG's lifetime more than ten times longer than other valve technologies. The straight through bore and short body construction means less wear. When it eventually does get worn the Ramén KSG ball sector valve is self-adjusting, which means that the valve changes operating position to keep flow characteristics intact.



## Technical specifications-KSG Valve

<b>Design</b>	KSG: Wafer type KSGF: Flanged PN10	
<b>Nominal sizes</b>	DN 80 - DN 200	3"-8"
<b>Material</b>		
Body	EN GJS-400-15	A53660-40-18
Lining body	Elathane®(PUR)	
Shafts	EN 1.4460	AISI 329
Ball Sector	EN GJS-400-15	A53660-40-18
Lining ball sector	NR+BR (6140010)	
O-rings	Nitrile	
Bearing	Rulon®	
<b>Working pressure</b>	DN 80 - DN 200	
	Max 5 bar(g)	
<b>Operating temperature</b>	Max. 60° C	Max. 140° F
<b>Characteristic</b>	Equal percentage	
<b>Rangeability</b>	100:1	
<b>Seat</b>	Elathane®(PUR)	

Industrial automation requires accurate and repetitive control with highest turn down ratio. Ramén supplies different types of automation to meet these criteria's from well-known global brands. All automation solutions supplied by Ramén are thoroughly tested with our valve technology to meet the most demanding requirements.

## Automation options

- Pneumatic actuator SR (Spring Return) or DA (Double Acting)
- Digital/Electro pneumatic/Pneumatic positioner
- Electrical actuator
- Hydraulic actuator



Pneumatic actuators, double acting or fail safe spring return with digital or pneumatic positioner for robust easy operations. Positioners offer options for feedback signal, HART, ATEX, Industrial bus systems like Profibus, FF etc.



Electrical actuators with integrated positioner for simple installation in any power system. Can be supplied with different options feedback signal, HART, ATEX, Industrial bus systems like Profibus, FF etc.



Electrical actuators with stepper motor for high end solutions to solve the most demanding applications where accuracy, repeatability and rangeability is essential.

## Ramén Valves AB

Fredsforstigen 22-24 | SE-168 67 BROMMA, Sweden | Phone: +46 8 594 779 70

[info@ramenvalves.com](mailto:info@ramenvalves.com) | [www.ramenvalves.com](http://www.ramenvalves.com)



@ramenvalves



Ramén Valves



# RAMÉN

Industrial Control Valves and Regulators